Lauritz Knudsen

Electrical & Automation

POWERING A NON-STOP INDIA

LOW VOLTAGE | INDUSTRIAL AUTOMATION | SOFTWARE SOLUTIONS

Maximum Retail Prices
For AU
Effective from 01-03-26

AU

©2026. ALL RIGHTS RESERVED

FROM THE COO'S DESK.

Lauritz Knudsen
Electrical & Automation

Dear Partner,

Your continued trust and partnership have been the cornerstone of our journey. Building on a legacy of over 70 years, and following our refreshed identity last year, we remain focused on delivering **innovative, reliable, and high-quality products** that power progress.

As part of this journey, we are pleased to **share an updated price list**. This revision reflects our ongoing commitment to **transparency, quality, and excellence,** ensuring you continue to receive the best value and service.

At Lauritz Knudsen, our philosophy remains simple yet powerful: **We listen. We partner. We innovate**.

These words guide our actions and shape the way we grow - together.

We look forward to continuing our collaboration and powering up homes, industries, farms, infrastructure, businesses, and lives - with you by our side.

Wishing you a joyful festive season and continued success.

Warm regards,
Naresh Kumar
COO & Sr. VP, Electrical Standard Products
Lauritz Knudsen Electrical & Automation

Translating Technology Into Real Benefits

AU Solutions for final distribution offer a unique blend of safety, convenience and performance. Each product in the AU Solutions range is designed to provide lasting benefits.

Lowest Watt Loss

Saves money and natural resources

MCBs from AU Solutions offer the lowest watt loss in the industry. On an average, the watt loss values are almost 55% lower than those prescribed by IEC.

Lower watt loss means lower power consumption, which directly translates into monetary savings. Beyond tangible benefits, lower power requirement also hints at lower consumption of natural resources used for producing energy. In a nutshell, these MCBs are a small, yet significant step towards sustainability.

Maximum Power Loss Per Pole (W)

Current Ratings (A)	As Per IS/IEC 60898	For AU Range of MCBs	% lower
0.5	3	1.9	38%
1	3	2	33%
1.6	3	2.1	30%
2	3	2.1	30%
3	3	2.1	30%
4	3	2.1	30%
5	3	2.1	30%
6	3	1.1	63%
10	3	1.2	60%
16	3.5	1.8	50%
20	4.5	1.9	58%
25	4.5	2.1	54%
32	6	2.4	60%
40	7.5	3.1	59%
50	9	4.1	54%
63	13	4.3	67%
80	15	3.9	74%
100	15	6.2	59%
125	20	9.2	54%

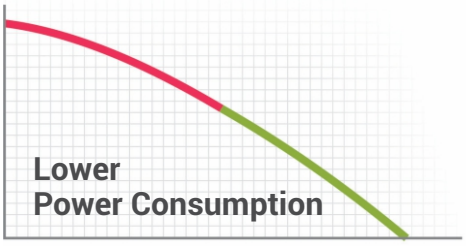

Greater Savings

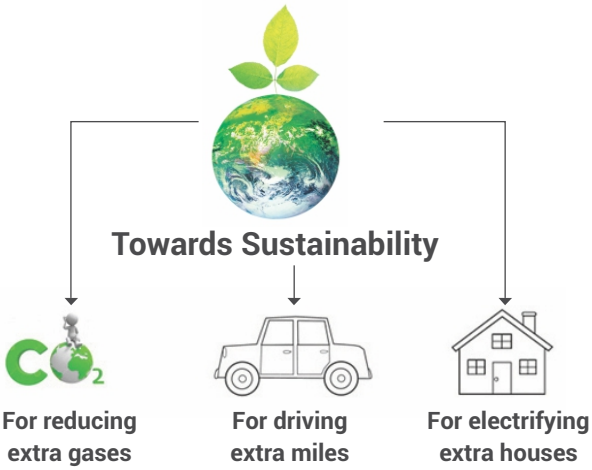

Note:
[Black colour : HSN code]
Current GST 18%, subject to changes as per Govt. notification

Short-circuit Fault Indicator in MCBs

Easy diagnosis, saves downtime

With the unique short-circuit fault indication feature, one can conclude if the MCB has tripped due to a short-circuit fault.

It helps in reducing downtime as the faulty phase and cause of MCB tripping are easily detected.

If the MCB has tripped on 'overload', non-critical loads can be switched off before switching the MCB on again.

In the case of a short-circuit fault, the location and cause of the short-circuit should be identified and the necessary corrective action should be taken.

UNIQUE BENEFIT

UNIQUE BENEFIT

Earth Leakage Fault Indication in RCDs

- Clear indication by yellow coloured flag
- Easy detection of occurrence of earth leakage

Flexibility

- **Flexibility in Termination**
  - Bi-connect terminals offer busbar or cable termination at both incoming and outgoing sides
- **Line-Load Reversibility**
  - Either of the sides of an RCCB can be used to terminate supply or load
- **RCCBs removability with busbar in place**
  - This feature, with a uniquely designed DIN clip, offers easy removal of DIN mounted RCCBs while the connection busbar is in place with adjoining devices
  - Offers great flexibility in installation process
  - Reduces installation time

Communication Capability

For smart systems

With the communication capability of AU Solutions, one can monitor and control various devices remotely.

The complete communication system can be deployed for effective energy management.

RoHS Compliance

Environment-friendly

RoHS compliant AU Solutions do not use any substances which are hazardous to the environment.

RoHS

MCBs (Miniature Circuit Breakers) [8536]

Range Highlights

- Conforms to IS/IEC 60898-1, EN 60898-1, IEC 60898-1, EN 60947-2, IS/IEC 60947-2
- Wide Range of Current Ratings - 0.5A to 125A
- Short circuit Breaking Capacity
  10kA (IS/IEC 60898-1, EN 60898-1) - 0.5A to 63A
  15kA (IS/IEC 60947-2) - 0.5 to 40A; 10kA (IS/IEC 60947-2) - 50A & 63A
  15kA (IS/IEC 60947-2, EN 60947-2) - 80, 100 & 125A
- B, C & D Characteristics
- Available in SP, DP, TP, FP, SPN and TPN
- Suitable for DC Application
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories

Standard Version AU-10 | 10kA as per IS/IEC 60898-1

Rating	Modules 1 Mod = 17.5 mm	B Curve CAT Nos.	M.R.P. (₹) Per Unit	C Curve CAT Nos.	M.R.P. (₹) Per Unit	D Curve CAT Nos.	M.R.P. (₹) Per Unit
Single Pole							
0.5A	1	-	-	AU10S10E53C	620	AU10S10E53D	625
1A	1	-	-	AU10S10013C	620	AU10S10013D	625
1.6A	1	-	-	AU10S11E63C	620	AU10S11E63D	625
2A	1	-	-	AU10S10023C	620	AU10S10023D	625
3A	1	-	-	AU10S10033C	620	AU10S10033D	625
4A	1	-	-	AU10S10043C	620	AU10S10043D	625
5A	1	-	-	AU10S10053C	620	AU10S10053D	625
6A	1	AU10S10063B	417	AU10S10063C	417	AU10S10063D	525
10A	1	AU10S10103B	417	AU10S10103C	417	AU10S10103D	525
16A	1	AU10S10163B	417	AU10S10163C	417	AU10S10163D	525
20A	1	AU10S10203B	417	AU10S10203C	417	AU10S10203D	525
25A	1	AU10S10253B	417	AU10S10253C	417	AU10S10253D	525
32A	1	AU10S10323B	417	AU10S10323C	417	AU10S10323D	525
40A	1	AU10S10403B	890	AU10S10403C	890	AU10S10403D	940
50A	1	AU10S10503B	890	AU10S10503C	890	AU10S10503D	940
63A	1	AU10S10633B	890	AU10S10633C	890	AU10S10633D	940
Two Pole							
0.5A	2	-	-	AU10S20E53C	1700	AU10S20E53D	1705
1A	2	-	-	AU10S20013C	1700	AU10S20013D	1705
1.6A	2	-	-	AU10S21E63C	1700	AU10S21E63D	1705
2A	2	-	-	AU10S20023C	1700	AU10S20023D	1705
3A	2	-	-	AU10S20033C	1700	AU10S20033D	1705
4A	2	-	-	AU10S20043C	1700	AU10S20043D	1705
5A	2	-	-	AU10S20053C	1700	AU10S20053D	1705
6A	2	AU10S20063B	1225	AU10S20063C	1225	AU10S20063D	1255
10A	2	AU10S20103B	1225	AU10S20103C	1225	AU10S20103D	1255
16A	2	AU10S20163B	1225	AU10S20163C	1225	AU10S20163D	1255
20A	2	AU10S20203B	1225	AU10S20203C	1225	AU10S20203D	1255
25A	2	AU10S20253B	1225	AU10S20253C	1225	AU10S20253D	1255
32A	2	AU10S20323B	1225	AU10S20323C	1225	AU10S20323D	1255
40A	2	AU10S20403B	1975	AU10S20403C	1975	AU10S20403D	2050
50A	2	AU10S20503B	1975	AU10S20503C	1975	AU10S20503D	2050
63A	2	AU10S20633B	1975	AU10S20633C	1975	AU10S20633D	2050
Three Pole							
0.5A	3	-	-	AU10S30E53C	2525	AU10S30E53D	2550
1A	3	-	-	AU10S30013C	2525	AU10S30013D	2550
1.6A	3	-	-	AU10S31E63C	2525	AU10S31E63D	2550
2A	3	-	-	AU10S30023C	2525	AU10S30023D	2550
3A	3	-	-	AU10S30033C	2525	AU10S30033D	2550
4A	3	-	-	AU10S30043C	2525	AU10S30043D	2550
5A	3	-	-	AU10S30053C	2525	AU10S30053D	2550
6A	3	AU10S30063B	2015	AU10S30063C	2015	AU10S30063D	2040
10A	3	AU10S30103B	2015	AU10S30103C	2015	AU10S30103D	2040
16A	3	AU10S30163B	2015	AU10S30163C	2015	AU10S30163D	2040
20A	3	AU10S30203B	2015	AU10S30203C	2015	AU10S30203D	2040
25A	3	AU10S30253B	2015	AU10S30253C	2015	AU10S30253D	2040
32A	3	AU10S30323B	2015	AU10S30323C	2015	AU10S30323D	2040
40A	3	AU10S30403B	3070	AU10S30403C	3070	AU10S30403D	3155
50A	3	AU10S30503B	3070	AU10S30503C	3070	AU10S30503D	3155
63A	3	AU10S30633B	3070	AU10S30633C	3070	AU10S30633D	3155

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP/SPN - 6 Nos., TP - 4 Nos., FP/TPN - 3 Nos.

Standard Version AU-10 | 10kA as per IS/IEC 60898-1

Rating	Modules 1 Mod = 17.5 mm	B Curve CAT Nos.	M.R.P. (₹) Per Unit	C Curve CAT Nos.	M.R.P. (₹) Per Unit	D Curve CAT Nos.	M.R.P. (₹) Per Unit
Four Pole							
0.5A	4	-	-	AU10S40E53C	3090	AU10S40E53D	3115
1A	4	-	-	AU10S40013C	3090	AU10S40013D	3115
1.6A	4	-	-	AU10S41E63C	3090	AU10S41E63D	3115
2A	4	-	-	AU10S40023C	3090	AU10S40023D	3115
3A	4	-	-	AU10S40033C	3090	AU10S40033D	3115
4A	4	-	-	AU10S40043C	3090	AU10S40043D	3115
5A	4	-	-	AU10S40053C	3090	AU10S40053D	3115
6A	4	AU10S40063B	2670	AU10S40063C	2670	AU10S40063D	2680
10A	4	AU10S40103B	2670	AU10S40103C	2670	AU10S40103D	2680
16A	4	AU10S40163B	2670	AU10S40163C	2670	AU10S40163D	2680
20A	4	AU10S40203B	2670	AU10S40203C	2670	AU10S40203D	2680
25A	4	AU10S40253B	2670	AU10S40253C	2670	AU10S40253D	2680
32A	4	AU10S40323B	2670	AU10S40323C	2670	AU10S40323D	2680
40A	4	AU10S40403B	3810	AU10S40403C	3810	AU10S40403D	3960
50A	4	AU10S40503B	3810	AU10S40503C	3810	AU10S40503D	3960
63A	4	AU10S40633B	3810	AU10S40633C	3810	AU10S40633D	3960
SPN							
0.5A	2	-	-	AU10SS0E53C	1610	-	-
1A	2	-	-	AU10SS0013C	1610	-	-
1.6A	2	-	-	AU10SS1E63C	1610	-	-
2A	2	-	-	AU10SS0023C	1610	-	-
3A	2	-	-	AU10SS0033C	1610	-	-
4A	2	-	-	AU10SS0043C	1610	-	-
5A	2	-	-	AU10SS0053C	1610	-	-
6A	2	-	-	AU10SS0063C	1135	-	-
10A	2	-	-	AU10SS0103C	1135	-	-
16A	2	-	-	AU10SS0163C	1135	-	-
20A	2	-	-	AU10SS0203C	1135	-	-
25A	2	-	-	AU10SS0253C	1135	-	-
32A	2	-	-	AU10SS0323C	1135	-	-
40A	2	-	-	AU10SS0403C	1825	-	-
50A	2	-	-	AU10SS0503C	1825	-	-
63A	2	-	-	AU10SS0633C	1825	-	-
TPN							
0.5A	4	-	-	AU10ST0E53C	2965	-	-
1A	4	-	-	AU10ST0013C	2965	-	-
1.6A	4	-	-	AU10ST1E63C	2965	-	-
2A	4	-	-	AU10ST0023C	2965	-	-
3A	4	-	-	AU10ST0033C	2965	-	-
4A	4	-	-	AU10ST0043C	2965	-	-
5A	4	-	-	AU10ST0053C	2965	-	-
6A	4	-	-	AU10ST0063C	2490	-	-
10A	4	-	-	AU10ST0103C	2490	-	-
16A	4	-	-	AU10ST0163C	2490	-	-
20A	4	-	-	AU10ST0203C	2490	-	-
25A	4	-	-	AU10ST0253C	2490	-	-
32A	4	-	-	AU10ST0323C	2490	-	-
40A	4	-	-	AU10ST0403C	3595	-	-
50A	4	-	-	AU10ST0503C	3595	-	-
63A	4	-	-	AU10ST0633C	3595	-	-

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP/SPN - 6 Nos., TP - 4 Nos., FP/TPN - 3 Nos.

MCBs (Miniature Circuit Breakers) : 80A-125A [8536]

Range Highlights

- Short circuit Breaking Capacity - 15kA (IS/IEC 60947-2, EN 60947-2)
- C & D Characteristics
- Available in SP, DP, TP and FP
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories



Rating	Modules 1 Mod = 17.5 mm	C Curve Cat. No.	M.R.P. (₹) Per Unit	D Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)					
80A	1.5	AU15S10803C	3175	AU15S10803D	3615
100A	1.5	AU15S11003C	3560	AU15S11003D	4045
125A	1.5	AU15S11253C	3830	AU15S11253D	4370
Double Pole (DP)					
80A	3	AU15S20803C	7035	AU15S20803D	8010
100A	3	AU15S21003C	7505	AU15S21003D	8535
125A	3	AU15S21253C	8260	AU15S21253D	9390
Three Pole (TP)					
80A	4.5	AU15S30803C	11100	AU15S30803D	12640
100A	4.5	AU15S31003C	11840	AU15S31003D	13455
125A	4.5	AU15S31253C	13140	AU15S31253D	14930
Four Pole (FP)					
80A	6	AU15S40803C	14500	AU15S40803D	16465
100A	6	AU15S41003C	15080	AU15S41003D	17160
125A	6	AU15S41253C	17080	AU15S41253D	19415

RCCBs (Residual Current Circuit Breakers) [8536]

Range Highlights*

- Conforms to IEC 61008-1, EN 61008-1, IS 12640-1
- Wide Range of Current Ratings - 16A to 100A
- Precise Sensitivities for variety of applications - from 10mA to 500mA
- 2P & 4P versions
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories
- Available in
  - » Type AC : For standard AC installations
  - » Type Adi : Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-AC

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P AC				
16A	10mA	2	AURAC201601	7425
25A	10mA	2	AURAC202501	8070
	30mA	2	AURAC202503	4170
	100mA	2	AURAC202510	4420
	300mA	2	AURAC202530	4420
	500mA	2	AURAC202550	5390
40A	30mA	2	AURAC204003	4770
	100mA	2	AURAC204010	5145
	300mA	2	AURAC204030	5145
	500mA	2	AURAC204050	6160
63A	30mA	2	AURAC206303	5790
	100mA	2	AURAC206310	6055
	300mA	2	AURAC206330	6055
	500mA	2	AURAC206350	6505
80A	30mA	2	AURAC208003	9450
	100mA	2	AURAC208010	9515
	300mA	2	AURAC208030	9515
100A	30mA	2	AURAC210003	10315
	100mA	2	AURAC210010	10395
	300mA	2	AURAC210030	10395

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
4P AC				
25A	30mA	4	AURAC402503	5555
	100mA	4	AURAC402510	5895
	300mA	4	AURAC402530	5895
	500mA	4	AURAC402550	7085
40A	30mA	4	AURAC404003	5610
	100mA	4	AURAC404010	5980
	300mA	4	AURAC404030	5980
	500mA	4	AURAC404050	7185
63A	30mA	4	AURAC406303	6440
	100mA	4	AURAC406310	6850
	300mA	4	AURAC406330	6850
	500mA	4	AURAC406350	7335
80A	30mA	4	AURAC408003	10670
	100mA	4	AURAC408010	10760
	300mA	4	AURAC408030	10760
	500mA	4	AURAC408050	11430
100A	30mA	4	AURAC410003	11365
	100mA	4	AURAC410010	11440
	300mA	4	AURAC410030	11440
	500mA	4	AURAC410050	11780

Type-Adi

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
25A	30mA	2	AURAD202503	6395
	100mA	2	AURAD202510	6690
	300mA	2	AURAD202530	6690
40A	30mA	2	AURAD204003	6785
	100mA	2	AURAD204010	6895
	300mA	2	AURAD204030	6895
63A	30mA	2	AURAD206303	7940
	100mA	2	AURAD206310	8090
	300mA	2	AURAD206330	8090
100A	30mA	2	AURAD210003	11730

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
4P Adi				
25A	30mA	4	AURAD402503	7735
	100mA	4	AURAD402510	7880
	300mA	4	AURAD402530	7880
40A	30mA	4	AURAD404003	8030
	100mA	4	AURAD404010	8155
	300mA	4	AURAD404030	8155
63A	30mA	4	AURAD406303	8745
	100mA	4	AURAD406310	8925
	300mA	4	AURAD406330	8925
100A	30mA	4	AURAD410003	13930
	300mA	4	AURAD410030	13930

*For technical details, please contact nearest branch office

RCBOs (Residual Current Breaker with Overcurrent Protection) [8536]

Range Highlights*

- Conforms to IEC 61009-1, IS 12640-2, EN 61009-1
- Short circuit Breaking Capacity - 10kA
- Precise Sensitivities for a variety of applications
  - » from 10mA to 300mA
- Suitable for Isolation

- Availability of wide Range of Site Mountable Accessories
- Available in
  - » Type AC: For standard AC installations
  - » Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-AC

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
		2P AC#		
6A	10mA	2	**AUF3C200601**	**5835**
	30mA	2	**AUF3C200603**	**5835**
	100mA	2	**AUF3C200610**	**5955**
	300mA	2	**AUF3C200630**	**6025**
10A	10mA	2	**AUF3C201001**	**5835**
	30mA	2	**AUF3C201003**	**5835**
	100mA	2	**AUF3C201010**	**5955**
	300mA	2	**AUF3C201030**	**6025**
16A	10mA	2	**AUF3C201601**	**5835**
	30mA	2	**AUF3C201603**	**5835**
	100mA	2	**AUF3C201610**	**5955**
	300mA	2	**AUF3C201630**	**6025**
20A	30mA	2	**AUF3C202003**	**5835**
	100mA	2	**AUF3C202010**	**5955**
	300mA	2	**AUF3C202030**	**6025**
25A	30mA	2	**AUF3C202503**	**5835**
	100mA	2	**AUF3C202510**	**5955**
	300mA	2	**AUF3C202530**	**6025**
32A	30mA	2	**AUF3C203203**	**5835**
	100mA	2	**AUF3C203210**	**5955**
	300mA	2	**AUF3C203230**	**6025**
40A	30mA	2	**AUF3C204003**	**5835**
	100mA	2	**AUF3C204010**	**5955**
	300mA	2	**AUF3C204030**	**6025**
63A	30mA	4	**AUF3C206303**	**6930**
	100mA	4	**AUF3C206310**	**7350**
	300mA	4	**AUF3C206330**	**7410**
		4P AC		
16A	30mA	7.5	**AUF3C401603**	**6265**
	100mA	7.5	**AUF3C401610**	**6975**
	300mA	7.5	**AUF3C401630**	**7115**
20A	30mA	7.5	**AUF3C402003**	**6265**
	100mA	7.5	**AUF3C402010**	**6975**
	300mA	7.5	**AUF3C402030**	**7115**
25A	30mA	7.5	**AUF3C402503**	**6265**
	100mA	7.5	**AUF3C402510**	**6975**
	300mA	7.5	**AUF3C402530**	**7115**
32A	30mA	7.5	**AUF3C403203**	**6470**
	100mA	7.5	**AUF3C403210**	**6980**
	300mA	7.5	**AUF3C403230**	**7135**
40A	30mA	7.5	**AUF3C404003**	**6570**
	100mA	7.5	**AUF3C404010**	**6980**
	300mA	7.5	**AUF3C404030**	**7155**
63A	30mA	7.5	**AUF3C406303**	**7875**
	100mA	7.5	**AUF3C406310**	**8020**
	300mA	7.5	**AUF3C406330**	**8020**
80A	30mA	12	**AUF3C408003**	**30515**
	100mA	12	**AUF3C408010**	**31195**
	300mA	12	**AUF3C408030**	**31195**
100A	30mA	12	**AUF3C410003**	**32620**
	100mA	12	**AUF3C410010**	**33400**
	300mA	12	**AUF3C410030**	**33400**

#For 2P AC/Adi D Curve RCBO, please contact nearest branch office

Type-Adi

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
		2P Adi		
6A	30mA	2	**AUF3D200603**	**7875**
	100mA	2	**AUF3D200610**	**8675**
	300mA	2	**AUF3D200630**	**9000**
10A	30mA	2	**AUF3D201003**	**7875**
	100mA	2	**AUF3D201010**	**8675**
	300mA	2	**AUF3D201030**	**9000**
16A	30mA	2	**AUF3D201603**	**7875**
	100mA	2	**AUF3D201610**	**8675**
	300mA	2	**AUF3D201630**	**9000**
20A	30mA	2	**AUF3D202003**	**7875**
	100mA	2	**AUF3D202010**	**8675**
	300mA	2	**AUF3D202030**	**9000**
25A	30mA	2	**AUF3D202503**	**7875**
	100mA	2	**AUF3D202510**	**8675**
	300mA	2	**AUF3D202530**	**9000**
32A	30mA	2	**AUF3D203203**	**7875**
	100mA	2	**AUF3D203210**	**8675**
	300mA	2	**AUF3D203230**	**9000**
40A	30mA	2	**AUF3D204003**	**7875**
	100mA	2	**AUF3D204010**	**8675**
	300mA	2	**AUF3D204030**	**9000**
63A	30mA	4	**AUF3D206303**	**9110**
	100mA	4	**AUF3D206310**	**9635**
	300mA	4	**AUF3D206330**	**9720**
		4P Adi		
16A	30mA	7.5	**AUF3D401603**	**8230**
	100mA	7.5	**AUF3D401610**	**9150**
	300mA	7.5	**AUF3D401630**	**9340**
20A	30mA	7.5	**AUF3D402003**	**8230**
	100mA	7.5	**AUF3D402010**	**9150**
	300mA	7.5	**AUF3D402030**	**9340**
25A	30mA	7.5	**AUF3D402503**	**8230**
	100mA	7.5	**AUF3D402510**	**9150**
	300mA	7.5	**AUF3D402530**	**9340**
32A	30mA	7.5	**AUF3D403203**	**8490**
	100mA	7.5	**AUF3D403210**	**9160**
	300mA	7.5	**AUF3D403230**	**9350**
40A	30mA	7.5	**AUF3D404003**	**8620**
	100mA	7.5	**AUF3D404010**	**9160**
	300mA	7.5	**AUF3D404030**	**9390**
63A	30mA	7.5	**AUF3D406303**	**10330**
	100mA	7.5	**AUF3D406310**	**10540**
	300mA	7.5	**AUF3D406330**	**10540**
80A	30mA	12	**AUF3D408003**	**30515**
	100mA	12	**AUF3D408010**	**31195**
	300mA	12	**AUF3D408030**	**31195**
100A	30mA	12	**AUF3D410003**	**32620**
	100mA	12	**AUF3D410010**	**33400**
	300mA	12	**AUF3D410030**	**33400**

*For technical details, please contact nearest branch office

Indicating Lights [8531]

Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
RED	1	AUIL01RED00	1275
YELLOW	1	AUIL01YEL00	1275
BLUE	1	AUIL01BLU00	1275
GREEN	1	AUIL01GRE00	1275
RED-YELLOW-BLUE	1	AUIL01RYB00	1550

SPDs (Surge Protection Devices) [8536]

Range Highlights

- Conforms to IEC 61643-11
- Available in Type 2 and Type 1+2
- Type 2 : Protection against indirect lightning and switching surges
  - » Maximum Discharge Current - Imax up to 70kA
- Type 1+2 : Protection against direct and indirect lightning surges
  - » Maximum Discharge Current - Imax up to 100kA

800V Solar Application

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage (Uc)	Cat. No.	M.R.P. (₹) Per Unit
Type 2, I_{max} 40kA	3P	4	1500	AUSP023P40-1500	15000
Type 1+2, I_{imp} 12.5kA	3P	5	1360	AUSP123P50-1360	45000
Type 1+2, I_{imp} 12.5kA	3P	4	880	AUSP123P50-880	30000

New

440V Application (Common + Differential Mode)

Description	I_{max}	Configuration	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Type 1+2, I_{imp} 12.5kA	50kA	1P+N	2	AUSP121PN50D	11955
		3P+N	4	AUSP123PN50D	22900
Type 2	40kA	1P+N	1	AUSP021PN40D	7475
		3P+N	2	AUSP023PN40D	14935
Type 2	15kA	1P+N	1	AUSP021PN15D	5980
		3P+N	2	AUSP023PN15D	11760
Type 1+2, I_{imp} 8kA	100kA	1P+N	2	AUSP121PN100D	10750
		3P+N	4	AUSP123PN100D	21120
Type 2	70kA	1P+N	2	AUSP021PN70D	11740
		3P+N	4	AUSP023PN70D	19550

SPD Cartridges

Description	Cat. No.	M.R.P. (₹) Per Unit
Cartridge for AUSP021PN15D	AUSC021PN15D	2940
Cartridge for AUSP021PN40D	AUSC021PN40D	3660
Cartridge for AUSP021PN70D / AUSP023PN70D	AUSC021PN70D	3915
Cartridge for AUSP023PN15D#	AUSC023PN15D	3845
Cartridge for AUSP023PN40D#	AUSC023PN40D	4885
Cartridge for AUSP121PN100D / AUSP123PN100D	AUSC121PN100D	5865
Cartridge for AUSP121PN50D / AUSP123PN50D	AUSC121PN50D	6330
Cartridge for AUSP023PN15D#	AUSC023PN15DG	4455
Cartridge for AUSP023PN40D#	AUSC023PN40DG	4650

#For technical details, please contact nearest branch office

Accessories [8538]

All Half Module and One Module Accessories are common for 80A-125A MCBs, RCBOs and Adi RCCBs

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage	CAT Nos.	M.R.P. (₹) Per Unit
Auxiliary Contact	1NO+1NC	0.5	240V AC, 24V DC	AUAXAC240	1110
AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240	1300
HR AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240HR	1300
Undervoltage	-	1	240V AC	AUUVAC240	2625
Release	-	1	24V DC	AUUVDC024	2625
Overvoltage Release	-	1	240V AC	AUOVAC240	3245
Shunt Release	-	1	240V AC	AUSRAC240	3010
	-	1	24V DC	AUSRDC024	3010
Padlock-Suitable for Lock Hasp 3.5 - 5 mm dia. max	Suitable for 1Pole=1Mod devices: RCCBs, RCBOs, Changeover Switches up to 40A			AUPD01	595
	Suitable for 1Pole-1.5Mod devices: MCBs 80A-125A, Changeover Switch 63A			AUPD02	670

Note: Standard Pack Quantity for Padlock - 2 Nos.
*For 80A-125A MCBs please contact nearest branch office

Energy Meters [9030]

Range Highlights

- DIN mounting whole current operated meter
- Accuracy Class 1.0
- Inbuilt RS485 option
- Parameters : Voltage, Current, kW, kWh, kVA, kVAh, RPM, Load hours, Interruptions

Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Single Phase - 60A	2	WD4010100000	3410
Three Phase - 80A	5	WD4020100000	7385
Single Phase - 60A (RS485)	2	WD4010110000	5045
Three Phase - 80A (RS485)	5	WD4020110000	11145

Isolators [8536]

Range Highlights

- Suitable for Isolation as per IEC 60947-3, IS/IEC 60947-3
  - » Providing operational safety at the downstream
- Comprehensive range suitable for various applications
- Utilization Category of AC-22A
- Suitability for Mounting Auxiliary Contact

Rating	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	AUI00202500	605
32A	2	AUI00203200	670
40A	2	AUI00204000	725
63A	2	AUI00206300	955
80A	2	AUI00208000	1165
100A	2	AUI00210000	1300
125A	2	AUI00212500	1480
Three Pole			
32A	3	AUI00303200	1170
40A	3	AUI00304000	1260
63A	3	AUI00306300	1480
80A	3	AUI00308000	1625
100A	3	AUI00310000	1725
125A	3	AUI00312500	1915
Four Pole			
32A	4	AUI00403200	1300
40A	4	AUI00404000	1635
63A	4	AUI00406300	1765
80A	4	AUI00408000	1945
100A	4	AUI00410000	2155
125A	4	AUI00412500	2370

Changeover Switches [8536]

Range Highlights

- Conforms to IEC 60947-3 and IS/IEC 60947-3
- Available in 3 positions (I-O-II) with centre off position
- Utilization category AC-22A

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	AUC00202500	1975
40A	2	AUC00204000	3020
63A	3	AUC00206300	3515

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Four Pole			
40A	4	AUC00404000	5205
63A	6	AUC00406300	5900

Modular Contactors [8536]

Range Highlights

- Wide Range of Current Ratings:
  - » 25A, 40A and 63A
- Conforms to:
  - » IEC 61095, EN 61095
  - » IEC 60947-4-1, EN 60947-4-1
  - » IEC 60947-5-1
- Protection Degree IP 20

Description (AC-1)	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
25A-1NO	1	AUMC1002501	2215
25A-2NO	1	AUMC2002501	2780
40A-2NO	3	AUMC2004003	4750
40A-3NO	3	AUMC3004003	6810
40A-4NO	3	AUMC4004003	7985
63A-2NO+2NC	3	AUMC2206303	8445
63A-3NO	3	AUMC3006303	8650
63A-4NO	3	AUMC4006303	9525
Accessory [8538]			
Auxiliary Contact, 2NO	0.5	AUMCAUX240	2070

Single Phase - ACCL [8536]

Automatic Changeover with Current Limiter

Range Highlights

- Conforms to IEC 60947-6, IEC 60947-3
- Wide Range of Current Ratings
  - » (Generator side) - 1A to 30A
  - » (Electricity Board side) - 30A
- RoHS compliant

Description EB/DG	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
30A/1A	4	AUCL01030001	2930
30A/1.5A	4	AUCL010301E5	2930
30A/2A	4	AUCL01030002	2930
30A/2.5A	4	AUCL010302E5	2930
30A/3A	4	AUCL01030003	2930
30A/4A	4	AUCL01030004	2930
30A/5A	4	AUCL01030005	2930
30A/6A	4	AUCL01030006	2930
30A/8A	4	AUCL01030008	2930
30A/10A	4	AUCL01030010	2930
30A/12A	4	AUCL01030012	2930
30A/15A	4	AUCL01030015	2930
30A/20A	4	AUCL01030020	2930
30A/30A	4	AUCL01030030*	2930

*Non-current limiting variant

Three Phase - ACCL [8536]

Automatic Changeover with Current Limiter

Range Highlights

- Settable overload current limit at DG side
- Separate power consumption monitoring for Mains & Genset
- Settable overvoltage & undervoltage protection
- Settable TPN or SPN mode at DG side
- Protection against single phasing

Description (AC-1) EB/DG	Cat. No.	M.R.P. (₹) Per Unit
32A / 32A	AUCL03032032	14385
40A / 32A	AUCL03040032	14825
40A / 40A	AUCL03040040	16045
50A / 50A	AUCL03050050	22870
63A / 50A	AUCL03063050	25235
63A / 63A	AUCL03063063	28585
80A / 80A	AUCL03080080	43565
125A / 125A	AUCL03125125	73335

For 3 Phase ACCL programming video please scan the QR code or click here

AU-COM: Communication Solution [8538]

Range Highlights

- Can be deployed for AU range of MCBs, RCCBs, RCBOs & energy meters
- Capable of local and remote status monitoring of final distribution products- ON, OFF and TRIP
- With AU-COM and modular contactors AU-MC, remote controlling of the load can be achieved
- The convertor module converts RS 485 data signals from AU–COM into SCADA-compatible ethernet signals
- For remote monitoring and metering of energy, single-phase and three-phase energy meters with RS 485 converters module can be Used

Description	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
AU-COM communication module	1.5	AUCOM0402	*
AU-CON convertor module	1.5	AUCON0403	*

*Please contact nearest branch office for details.

General Terms

All prices are on Maximum retail price basis inclusive of all duties, GST & any other tax as applicable.

Warranty Policy

All products listed in the price list are covered by a warranty against manufacturing defects for a period of 18* months from the date of purchase. For Lauritz Knudsen MCBs & Isolators mounted inside Lauritz Knudsen Distribution Boards, an extended warranty of 5 years is provided.

In the event of a defect due to faulty workmanship or other associated reasons, we will, at our discretion, remedy the defect or replace the faulty parts or the entire product as soon as possible, free of cost.

However, the warranty is subject to proper usage, efficient maintenance, and does not cover defects arising from fire, accidents, inefficient maintenance, faulty operation, or deliberate or accidental damage. It also does not cover damage to power electronic components such as thyristors & IGBTs, which primarily fail due to overtemperature & over-voltage. Users need to take adequate precautions to eliminate these conditions. Manufacturer shall not be responsible & liable for any special, incidental, social or consequential (including lost profits) loss, consequential damages, injury or damages (punitive) of any kind solely attributable to defect or failure of its products. Manufacturer shall not be liable in any manner for the issue of or failure in the performance of other equipment the product is attached to.

Comprehensive Service Support

Lauritz Knudsen Electrical & Automation has over seven decades of experience in providing after sales service for low voltage distribution system in every type of industry & commercial complex in India

Lauritz Knudsen Electrical & Automation offers the following services, partnering you in your maintenance of low voltage distribution products:

- Regular Maintenance
- Preventive Maintenance Programme
- On Call
- Annual Maintenance Contract
- Product Support for Managing Obsolescence-

Please visit www.LK-EA.com for latest update on our products & prices.

Switchgear Training Centres

Pune
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
T-156 / 157, MIDC,
Bhosari, Pune - 411 026
Tel: 020-2712 0037 / 2712 0653
E-mail: STC-PUNE@LK-EA.com

Lucknow
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
C-6 & 7, UPSIDC,
P. O. Sarojininagar,
Lucknow - 226 008
Tel: 97944 54455
E-mail: STC-LUCKNOW@LK-EA.com

Delhi
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
A-25, Imperia Complex, First Floor
Mohan Cooperative Industrial Estate
Near Sarita Vihar / Mohan Estate Metro Station
Main Mathura Road, New Delhi - 110044
Tel: 9899020306 / 9720186726 / 9560845094
E-mail: STC-DELHI@LK-EA.com

Kolkata
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre,
2nd Floor, Block BN3, Sector V,
Salt Lake City,
Kolkata - 700091, West Bengal
Tel: 7738717893 / 7797795567
E-mail: STC-KOLKATA@LK-EA.com

Vadodara
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Behind L&T Knowledge City,
Near Village Ankhol,
Vadodara - 390019
Tel: 0265 6147805 / 6147808
E-mail: STC-VADODARA@LK-EA.com

Coonor
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Ooty-Coonoor Main Road
Yellanahalli P.O.,
The Nilgiris - 643 243
Tel: 0423 251 7107
E-mail: STC-COONOOR@LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022 6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com

Lauritz Knudsen
Electrical & Automation

Notes:

Electrical Standard Products (ESP) Offices

HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.
Tel: 022-6722 6300 | **Fax:** 022-6705 1112 | **e-mail:** CIC@LK-EA.com

BRANCH OFFICES

Lauritz Knudsen Electrical & Automation
C-201, The First Commercial Complex,
B/S Keshavbaug Party Plot, Vastrapur,
Ahmedabad - 380 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Shri Daneshwari, 1st Floor,
Plot No. 17, 2nd Cross, Near Old Income
Tax Office Road, Vidyanagar,
Hubballi - 580 021
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
No.10, Fortuna Towers, 2nd Floor,
Rana Pratap Marg, Near NBRI,
Lucknow - 226 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A06/A07, Second Floor,
Grand Chandra Complex, Frazer Road
Patna - 800 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Wework Central, #36 Infantry Road,
Bengaluru - 560 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
AWFIS Space Solutions, Prestige Phoenix,
4th floor, 1405, Umanagar, Begumpet,
Hyderabad - 500 016
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
El Dorado Building, 3rd Floor, 6,
Venkatraman Street, Chinna Chokkikulam,
Madurai - 625 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
UrbanWrk, 5th Floor, Sai Radhe,
Raja Bahadur Mill Road, Behind Hotel
Grand Sheraton, Sangamwadi
Pune - 411 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Work loop Unit-612, 6th Floor,
Esplanade One, Rasulgarh,
Bhubaneswar - 751 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workie, 214 - 2nd Floor,
Apollo Premier, PU-4,
Scheme No. 54, Vijay Nagar Square,
Indore - 452 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Bestech Business Park,
Tower - A, 2nd floor, Sector - 66
Mohali - 160059
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 211 & 212, Pithalia Plaza,
KK Road, Near Fafadih Chowk,
Raipur - 492 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
801 Word Level-8, No. 28,
SIDCO Industrial Estate, Guindy,
Chennai - 600 032
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 430, 4th Floor,
Jaipur Electronic Market, Riddhi Siddhi,
Gopalpura Bypass,
Jaipur - 302 018
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
TC II, Tower B, PRIMA BAY Gate No. 5,
Saki Vihar Road Powai,
Mumbai - 400 072
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
DevX 4th Floor, A Wing, Om 9 Square,
150 Ft Ring Road, Near Nana Mava Circle,
Opp Silver Heights,
Rajkot - 360 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Playworkz Coworking Space
43 & 44, 3rd Cross,
Bharathy Colony, Peelamedu,
Coimbatore - 641 004
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
GDR Siddha, Ground Floor, N Road
Bistupur, Opposite St. Mary's Church,
Jamshedpur - 831 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Unnati Building, 2nd Floor,
Automation Campus, A-600, TTC Industrial
Area Shil-Mahape Road, Mahape,
Navi Mumbai - 400 710
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
10th Floor, Titaanium Business,
Bhimrad Road, Althan
Surat - 395 017
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
3rd Floor, 1&2 Vijay Park,
Main Chakrata Road, Opp. Anandam,
Near Ballupur chowk,
Dehradun - 248 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Business Communication Centre
2nd Floor, Chiramel Chambers,
Kurisupally Road, Ravipuram,
Kochi - 682 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
M1 & M2, Mezzanine Floor,
Himalaya Excellency,
Plot No. C-47, Pratap Nagar Square,
Nagpur - 440 022
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
11th Floor, Block-D, Notus IT Park,
Sarabhai Campus, Bhailal Amin Marg,
Vadodara - 390 023
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Ground Floor, B-27,
Biplab Rashbihari Sarani,
Sector 2A, Bidhan Nagar,
Durgapur - 713 212
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz & Knudsen Electrical & Automation
207, 2nd floor, Revolution Complex,
Station Road, E Ward,
Next to Pedestrian Bridge,
Kolhapur - 416 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, Samarth House,
Opposite Titan World,
Samarth Nagar, Mahatma Nagar,
Nasik - 422 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Qubexpro Business Centre,
4th Floor, V Mall, Above Lifestyles,
Facor Layout, Waltair Uplands,
Visakhapatnam - 530 003
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
6th Floor, Exotica Greens, A Block, 191,
R G Baruah Road, Guwahati Central,
Guwahati - 781 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, BN3, Salt Lake, Sector-V,
Kolkata - 700 091
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A-25, 1st Floor, Imperia Complex,
Mohan Corporative Industrial Estate,
Near Sarita Vihar Metro Station,
Mathura Road,
New Delhi - 110 044
Phone no: 022-6932 7800
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.

Lauritz Knudsen
Electrical & Automation

Lauritz Knudsen Electrical & Automation, Electrical Standard Product
A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710,
Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022-6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com

SP 50494 Z